


Hydraulic Vari-Width Double Bale Handler

The *Cashels Hydraulic Vari-Width Double Bale Handler* has been developed for the farmer/contractor who needs to transport large volumes of round, wrapped silage bales from the field to the storage area.

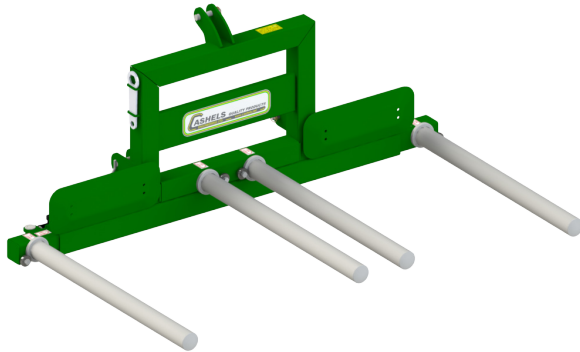

The outer prongs on the Vari-Width Double Bale Handler can be adjusted by means of hydraulic cylinders, allowing the operator to collect bales regardless of shape or size. The prongs/rollers rotate on CAT 2 stone fork tines to ensure there is no damage to the film during operation. The two centre tines/rollers are positioned to clear the first bale from the ground when picking the second bale. See Fig. 1-4.

Key Features:

- The rollers can easily be removed, allowing the unit to be used for spiking round bales of hay and straw during the harvesting season.
- Collects and transports two wrapped silage bales.
- Handles sagged or misshapen bales.
- Heavy-duty construction.
- Can be used on front or rear 3-point linkage.
- Hot-dip galvanised roller tubes.
- Various linkage options available.
- Available in a 4ft and 5ft model.




Fig. 1




Fig. 2




Fig. 3




Fig. 4

See video on www.cashels.net

Model	Length	Max Width	Height	Linkage	Load Capacity	Net Weight	Tractor HP
4ft	1450mm (57")	3500mm (138")	924mm (36")	CAT 2	2 Bales 2000kg (4400lbs)	345kg (759lbs)	100+
5ft	1450mm (57")	3980mm (157")	924mm (36")	CAT 2	2 Bales 2000kg (4400lbs)	345kg (759lbs)	100+