

Pick & Stack Bale Handler

The **Cashels Pick & Stack Bale Handler** has been developed to cater for the transportation & stacking of wrapped bales without causing damage to the film. A hydraulic top link is required when operating the **Pick & Stack Bale Handler**.



The unit contains a telescopic mast in conjunction with a **Ducks Foot Bale Handler**.

The unique design allows the unit to be used for stacking wrapped bales two-high at the storage area as well as for loading and unloading bales to and from a trailer (Fig.1).


During the winter period the unit can be used for handling/loading mature round bales into feed trailers and stock feeders.

Key Features:

- Transports & stacks bales two-high.
- Loads & unloads bales to and from a bale trailer.
- Handles mature bales during feeding season.
- Handles misshapen/sagged bales.
- Heavy duty construction throughout.
- Available in a 4ft and 5ft model.



Standard Configuration



Winter Configuration

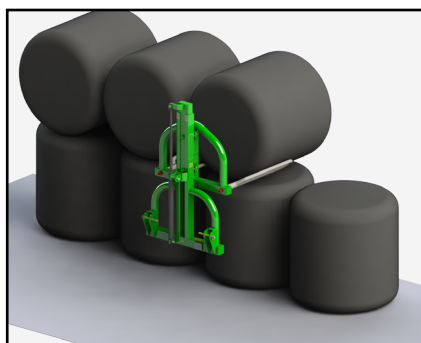


Fig. 1

See video on www.cashels.net

Model	Length	Width	Max Lift Height	Linkage	Load Capacity	Net Weight	Tractor HP
4ft	1467mm (58")	1150mm (45")	1250mm (49")	CAT 1 & 2	2 Bales 1500kg (3300lbs)	140kg (309lbs)	60+
5ft	1535mm (60")	1300mm (51")	1250mm (49")	CAT 1 & 2	2 Bales 2000kg (4400lbs)	210kg (463lbs)	60+