

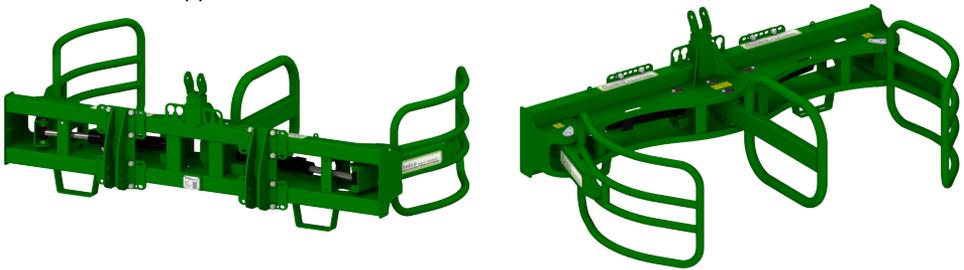


Hydraulic Double Bale Grab

The *Cashels Hydraulic Double Bale Grab* has been developed to increase the efficiency of handling and transporting wrapped, round silage bales which have been tipped on their end from the wrapper.

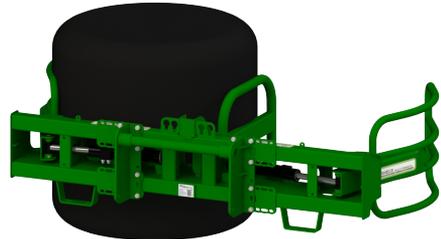

This robust unit can move large volumes of wrapped bales when mounted on the front or rear 3-Point linkage of larger horsepower tractors. The Double Bale Grab can also be configured for use on larger horsepower tractor loaders and farm loaders. The unique shape of the frame and the paddle combination ensures that the bale maintains its shape and integrity.

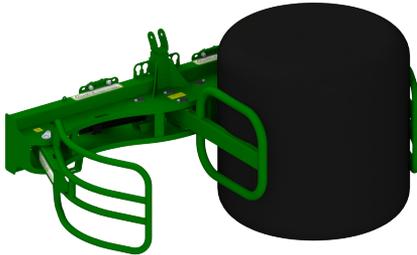

Shown with optional Manitou linkage.

Key Features:

- Unique curved design to maintain bale integrity while also providing maximum strength and durability to the unit.
- Slimline, robust paddles manufactured from high grade structural tube.
- Heavy-duty hydraulic cylinders fitted with check valves.
- Suitable for use on both 3-point linkage as well as front loaders.
- Stands included for ease of fitting to 3-point linkage or loader.
- Available in a 4ft and 5ft model.

See video on www.cashels.net

Model	Length	Width	Height	Linkage	Load Capacity	Net Weight	Max Opening	Max Closed	Tractor HP
4ft	1500mm (59")	2360mm (93")	830mm (33")	CAT 2 / EURO	2 Bales 1500kg (3300lbs)	375kg (825lbs)	1600mm (63")	430mm (17")	100+
5ft	1500mm (59")	2680mm (106")	830mm (33")	CAT 2 / EURO	2 Bales 2000kg (4400lbs)	385kg (847lbs)	1700mm (67")	570mm (22")	100+